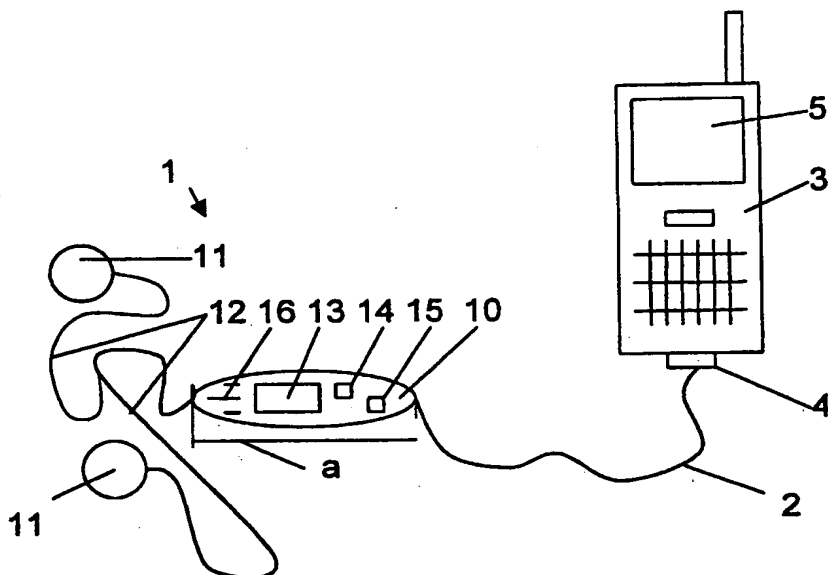


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04M 1/00	A1	(11) International Publication Number: WO 00/65803 (43) International Publication Date: 2 November 2000 (02.11.00)
(21) International Application Number: PCT/SE00/00788 (22) International Filing Date: 26 April 2000 (26.04.00) (30) Priority Data: 9901520-8 26 April 1999 (26.04.99) SE 9904102-2 12 November 1999 (12.11.99) SE (71)(72) Applicant and Inventor: DELALAT, Hamid [SE/SE]; Polhemsgatan 27 B, S-371 40 Karlskrona (SE). (74) Agents: BERGLUND, Stefan et al.; Bjerkéns Patentbyrå KB, Östermalmsgatan 58, S-114 50 Stockholm (SE).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>In English translation (filed in Swedish).</i>

(54) Title: A DEVICE FOR CONTROLLING A CELLULAR TELEPHONE**(57) Abstract**

The invention refers to a device for controlling a mobile telephone (3) with a plurality of functions, comprising an answering function for a call from another subscriber and a calling function for a call to another subscriber. The device (1) comprises a separate control unit (10), a connecting member (2) for connecting the control unit (10) to a communication port of the mobile telephone (3), a microphone (16) associated with the control unit, and a loudspeaker (11) associated with the control unit. The control unit (10) comprises at least one information providing member (13) and a control member (14, 15). The control member is arranged to provide a user with information related to said functions via the information providing member and to allow activating of said functions by means of the control member.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

A device for controlling a cellular telephone

5

BACKGROUND OF THE INVENTION AND PRIOR ART

The present invention refers to a device for controlling a mobile telephone with a plurality of functions, comprising
10 an answering function for a call from another subscriber and a calling function for a call to another subscriber, wherein the device comprises a separate control unit, a connecting member for connecting the control unit to a communication port of the mobile telephone, a microphone associated with
15 the control unit, and a loudspeaker associated with the control unit.

Such devices for mobile telephones are often named "hands-free". These are available in a large number of
20 accomplishments. The simplest types comprise in principle only a microphone and a loudspeaker, wherein the mobile telephone is operated in a common way by the normal keyboard of the mobile telephone. Today, there are also "hands-frees" that comprise a control key, by which the mobile telephone
25 can be activated at an incoming call or turned off if one does not desire to receive the call. However, these known devices have the disadvantages that in many situations one is bound to take up the mobile telephone to get at the keyboard of the mobile telephone and achieve desired
30 functions.

US-A-5,557,563 shows a separate device with a loudspeaker, a microphone, and a control unit. The device is intended to be connected to a common wireless telephone and is not designed
35 to be used together with a mobile telephone.

SUMMARY OF THE INVENTION

The object of the present invention is to provide a device, by which a user can utilise his mobile telephone for a large number of common functions without using the normal keyboard of the mobile telephone.

This object is achieved by the initially defined device which is characterised in that the control unit comprises at least one information providing member and a control member, wherein the control member is arranged to provide a user with information related to said functions via the information providing member and to allow activating of said functions by means of the control member.

By such a device, a user can utilise fundamental, normal functions of a mobile telephone. The user obtains information about the status of the mobile telephone via the information providing member and can, from this information, activate different functions by means of the control member. Advantageously, the control unit is arranged to provide a user with information about a calling subscriber by means of the information providing member before the answering function is activated. Thus, by such a number information, a user can find out who is calling before answering the mobile telephone without needing to pick up the mobile telephone. Furthermore, by means of the control member and the information providing member, the control unit can be arranged to allow selection of one of a number of subscribers, and thereafter activate the calling function for calling the selected subscriber. Consequently, the user can obtain information about a number of subscribers via the information providing member and activate the control unit when the information providing member indicates a desired subscriber.

According to an embodiment of the invention, the control member comprises a first operating position for activating one of said functions and a second operating position for said selection. For that purpose, the mobile telephone can
5 be arranged to provide a directory containing said number of subscribers and the control member in the second operating position can be arranged to allow said selection of one of said number of subscribers by means of a search in said directory, wherein the information providing member is
10 arranged to inform about found subscribers during said search, and wherein the control member in the first operating position is arranged to activate the calling function with respect to the found subscriber. Thus, by guiding the control member to the first operating position,
15 a user can browse among the subscribers stored in the directory. At the same time, the user obtains information about which subscriber for the moment has been found. When the desired subscriber has been found in the directory, the user can activate the calling function by guiding the
20 control member to the second operating position, and thus in an easy way call the desired subscriber.

According to a further embodiment of the invention, the control member comprises at least one key for achieving said
25 operating positions. Such a key can have a centre zero position and by guiding the key in one direction, the first operating position is reached, and in the other direction, the second operating position is reached. Preferably, the key resiliently returns to the centre zero position. The
30 control member may also comprise two keys, wherein a pressing on these corresponds to a first operating position and a second operating position, respectively.

According to a further embodiment of the invention, the
35 information providing member comprises a display member. Thus, a user can see on the display member, for instance

which subscriber is calling or follow the search of said number of subscribers in the directory. As an alternative or a complement, the information providing member may also comprise a member to accomplish synthetic speech via the
5 loudspeaker. With such synthetic speech it is thus possible to tell the user which subscriber is calling or which subscriber has been found for the moment in the directory at a search therein.

10 According to a further embodiment of the invention, the control unit comprises a processor member, for instance a micro processor of the type Digital Signal Processor, DSP, by which the above mentioned functions can be accomplished.

15 According to a further embodiment of the invention, the control member comprises means arranged to allow achievement of said operation positions by means of voice control. Thus, in this manner, a user can achieve said operating positions by voice commands. In that way, the user does not need to
20 use his hands at all to activate the mobile telephone. Advantageously, the control unit comprises a memory member which is connected to the processor member and arranged to store voice commands.

25 According to a further embodiment of the invention, the connecting member comprises an electric cable. However, it is also possible to let the connecting member comprise an IR-communication or a Bluetooth-communication.

30 According to a further embodiment of the invention, the device comprises a housing arranged to accommodate the control unit and the microphone. Such a housing may have a suitable design and be designed in a suitable size.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is now to be explained more closely by means of a description of different embodiments and with reference to the appended drawings.

5

Fig. 1 discloses the device according to the invention together with a mobile telephone.

Fig. 2 discloses schematically a block diagram of a first embodiment of the device according to the invention.

10

Fig. 3 discloses schematically a block diagram of a second embodiment of the device according to the invention.

Fig. 4 discloses schematically a third embodiment of the device according to the invention.

15

DETAILED DESCRIPTION OF DIFFERENT EMBODIMENTS OF THE INVENTION

20 Fig. 1 discloses a device 1 according to the invention, which via a connection 2 is connected to a mobile telephone 3. The mobile telephone 3 is of a conventional type and comprises a communication port 4 for connecting of external equipment, for instance of the type "hands-free". The mobile
25 telephone 3 comprises the common functions of a mobile telephone, such as an answering function for a call from another subscriber, a calling function for a call to another subscriber, a directory function for storage of a number of telephone numbers which a user employs more frequently than
30 others, a number information function, which provides a user with information about the telephone number or the name of a calling subscriber, etc. The prevailing status concerning the different functions can, on the display 5 of the mobile telephone 3, be followed by a user. In this application, the
35 other telephone or another communication apparatus, which a

user communicates with via the mobile telephone 3, is named a subscriber for the sake of simplicity.

The device 1 comprises, besides the connection 2, a control
5 unit 10 and one or two loudspeakers 11, preferably of the
earphone type. In the disclosed embodiment, the device 1
comprises two loudspeakers 11, which are connected to the
control member 10 via an electric cable 12, respectively. It
10 is advantageous with more than one loudspeaker 11 when the
device 1 is utilised for listening to music, for instance by
means of the so-called MP3-technique. The control unit 10 is
disclosed more closely in Fig. 2. The control unit 10
comprises an information providing member in the form of a
15 display member 13, a control member in the form of two keys
14 and 15, a microphone 16, a connecting member 17 by which
the control unit 10 is connected to the connection 2, and a
microprocessor 18. As will be seen from Fig. 2, all com-
ponents, i.e. the loudspeakers 11, the display member 13,
20 the keys 14, 15, the microphone 16, and the connecting
member 17 are connected to the microprocessor 18, which
consequently is arranged to control and monitor all
components of the device 1. The microprocessor 18 can be a
microcomputer of different types, for instance a digital
signal processor, DSP. The connection 2, which connects the
25 communication port 4 and the connecting member 17 may,
according to a first embodiment, comprise an electric cable
with a number of conductors for transmission of different
signals. According to other embodiments of the invention,
the connection 2 may comprise a IR-communication or a
30 Bluetooth-communication.

The keys 14 and 15 can be shaped physically in many
different ways. For instance, the control member may
comprise only one key, which can be displaced in two
35 different directions for achievement of different operating
positions. It is also possible to provide the device with

more than the two shown keys 14, 15. Preferably, the keys comprise an activating key 14 and a selection key 15, which are more closely explained below.

5 The display member 13 can be a display of a conventional LCD-type and of such a size that at least one normal telephone number easily can be viewed by a user. Preferably, the display member 13 is designed in such a way that it can replace the display 5 of the mobile telephone 3 and thus
10 allow reading of, for instance, SMS-messages. The control unit 10 goes into a housing or a casing which has relatively small outer dimensions, for instance with a length a of 3-10 cm, preferably 4-7 cm. When the device is used by a user, the loudspeaker 11 is put into the ear of the user, whereby
15 the electric cable 12 has such a length that the control unit 10 is located below the face of the user. Thus, by lifting the control unit 10, the user can operate both the keys 14 and 15 with one finger and meanwhile view the information via the display member 13.

20 However, the display member 13 may also be designed as a display member of a less conventional type, for instance a projecting display member, which may comprise means to project the image that is shown by means of the display
25 member 13, for instance on spectacles, which are carried by the user of the device 10. It should also be noted that the display member may be arranged to project the image to be shown to the user directly on the retina of the user by means of laser technique.

30 When another subscriber calls the mobile telephone 3, the telephone number of the calling subscriber, or possibly the name of the calling subscriber, will be shown on the display member 13. The control unit 10 obtains this information via
35 the connection 2 from the mobile telephone 3. The user can now choose to answer a call by activating the answering

function of the mobile telephone 3. According to one embodiment, that can be done in such a way that the function answer is marked on the display member, whereby the user by pressing the activating key 14 activates the answering function of the mobile telephone 3. If the user does not want to answer the call, he may press the selection key 15, whereby the command quit has been marked on the display member 13. If the user now presses the activating key 14, the call will be discontinued.

10

Also the calling can be managed completely by the disclosed control unit 10. By means of the selection key 15, the user can browse in the directory of subscribers of the mobile telephone 3, wherein a pressing results in that a subscriber is shown on the display member 13. When the display member 13 shows the desired subscriber, users can activate the calling function of the mobile telephone 3 by pressing the activating key 14. In such manner many common functions of the mobile telephone 3 can be totally controlled by means of the device 1 according to the invention.

20

It is also possible that the information providing member comprises the loudspeaker 11, i.e. a user can obtain information about a calling subscriber, number information, via the loudspeaker 11 by means of synthetic speech. Also when searching in the subscriber directory of the mobile telephone 3, the user can be informed about the gradually fed subscriber numbers, or the names, via the loudspeaker 11 and/or by synthetic speech.

30

Fig. 3 discloses a second embodiment of the invention, which differs from the first embodiment by the fact the control unit 10 also comprises means for voice control. Thus according to a possible variant, the two keys 14, 15 can be replaced or complemented with two voice commands, by which a function can be activated or a selection can be made in a

35

corresponding way as by the keys 14 and 15. According to a more advanced embodiment, it is, of course, also possible to let the user define, for instance a name of another subscriber, wherein this subscriber automatically is called.

5 In this embodiment, the control unit 10 also comprises a memory member 20, in which suitable voice commands can be stored.

10 The device 1 may also comprise a current source in those cases the voltage that can be obtained from the mobile telephone 3 is not enough, for instance when the communication with the mobile telephone is intended to be effected by means of the above mentioned Bluetooth-technique. Fig. 3 discloses, as an example, a battery 21
15 arranged in the control unit 10. Advantageously, the battery 21 is rechargeable.

Fig. 3 also discloses, as an example, a digital camera 22, which is arranged in the control unit 10 to allow transfer
20 of pictures from a user via the mobile telephone 3. The digital camera 22 can be internal, i.e. mounted in the control unit 10, or external, i.e. arranged as a separate unit connected to the control unit 10 by means of some suitable connection.

25

Fig. 4 discloses a third embodiment of the invention, which is intended to allow access and use of a larger number of functions of the mobile telephone 3 by means of the control unit 10. In this example, the control unit comprises a large
30 number of keys 31, 32, 33, 34, and 35, of which, for instance the keys 31 and 32, comprise the above mentioned activating and selection keys, and the key 35 forms a so-called joy-stick. This embodiment is particularly suitable to allow use of those games, which to an increasing extent
35 are available in mobile telephones 3. The display member 13 can then be slightly larger than in the first embodiments

and be adapted to different applications. In this case, the above mentioned projecting display member 13 can be particularly advantageous. The control unit 10 also comprises a volume adjusting key 36 for adjustment of the volume of the sound from the loudspeaker 11. Furthermore, this embodiment comprises an additional microphone 37 to allow an improvement of the sound quality of the transmitted sound. Such a volume adjusting key 36 and such an additional microphone 37 can also be comprised by of those embodiments disclosed in Figs. 1-3.

The present invention is not limited to the embodiments described but may be varied and modified within the scope of the following claims.

15

It should be noted that more than one device 1 can be arranged to control the one and same mobile telephone 3. It is also possible to control more than one mobile telephone 3 by the one and same device 1. Those applications of the invention are particularly useful when the connection 2 is wireless and for instance is accomplished by a Bluetooth-communication.

20

Claims

1. A device for controlling a mobile telephone (3) with a plurality of functions, comprising an answering function for a call from another subscriber and a calling function for a call to another subscriber, wherein the device (1) comprises a separate control unit (10), a connecting member (2, 17) for connecting the control unit (10) to a communication port (4) of the mobile telephone (3), a microphone (16) associated with the control unit, and a loudspeaker (11) associated with the control unit, characterised in that the control unit (10) comprises at least one information providing member (11, 13) and a control member (14, 15, 16), wherein the control member is arranged to provide a user with information related to said functions via the information providing member (11, 13) and to allow activating of said functions by means of the control member (14, 15, 16).
2. A device according to claim 1, characterised in that the control unit (10) by means of the information providing member (11, 13) is arranged to provide a user with information about a calling subscriber before the answering function is activated.
3. A device according to any one of claims 1 and 2, characterised in that the control unit (10), by means of the control member and the information providing member (13) is arranged to allow selection of one of a number of subscribers and thereafter to activate the calling function for calling the selected subscriber.
4. A device according to claim 3, characterised in that the control member (14, 15, 16) comprises a first operating position for activating one of said functions.

5. A device according to claim 4, characterised in that the control member (14, 15, 16) comprises a second operating position for said selections.

5 6. A device according to claim 5, wherein the mobile telephone (3) is arranged to provide a directory containing said number of subscribers, characterised in that the control member (14, 15, 16) in the second operating position is arranged to allow said selection of one of said number of
10 subscribers by means of a search in said directory, wherein the information providing member (11, 13) is arranged to inform about found subscribers during said search, and wherein the control member (14, 15, 16) in the first operating position is arranged to activate the calling
15 function with respect to the found subscriber.

7. A device according to any one of claims 5 and 6, characterised in that the control member (14, 15, 16) comprises at least one key (14, 15) for achieving said
20 operating positions.

8. A device according to any one of the preceding claims, characterised in that the information providing member (11, 13) comprises a display member (13).
25

9. A device according to any one of the preceding claims, characterised in that the information providing member (11, 13) comprises a member to accomplish synthetic speech via the loudspeaker (11).
30

10. A device according to any one of the preceding claims, characterised in that the control unit (10) comprises a processor member (18).

35 11. A device according to claims 5 and 10, characterised in that the control member (14, 15, 16) comprises means (16,

20) arranged to allow achievement of said operating positions by means of voice control.

5 12. A device according to claim 11, characterised in that the control unit (10) comprises a memory member (20) for the processor member (18), which memory member (20) is arranged to store voice commands.

10 13. A device according to any one of the preceding claims, characterised in that the connecting member (2, 17) comprises an electric cable.

15 14. A device according to any of the preceding claims, characterised in that the connecting member (2, 17) comprises an IR-communication.

20 15. A device according to any one of the preceding claims, characterised in that the connecting member (2, 17) comprises a Bluetooth-communication.

25 16. A device according to any of the preceding claims, characterised in that the device comprises a housing which is arranged to accommodate the control unit (10) and the microphone (16).

1/3

FIG 1



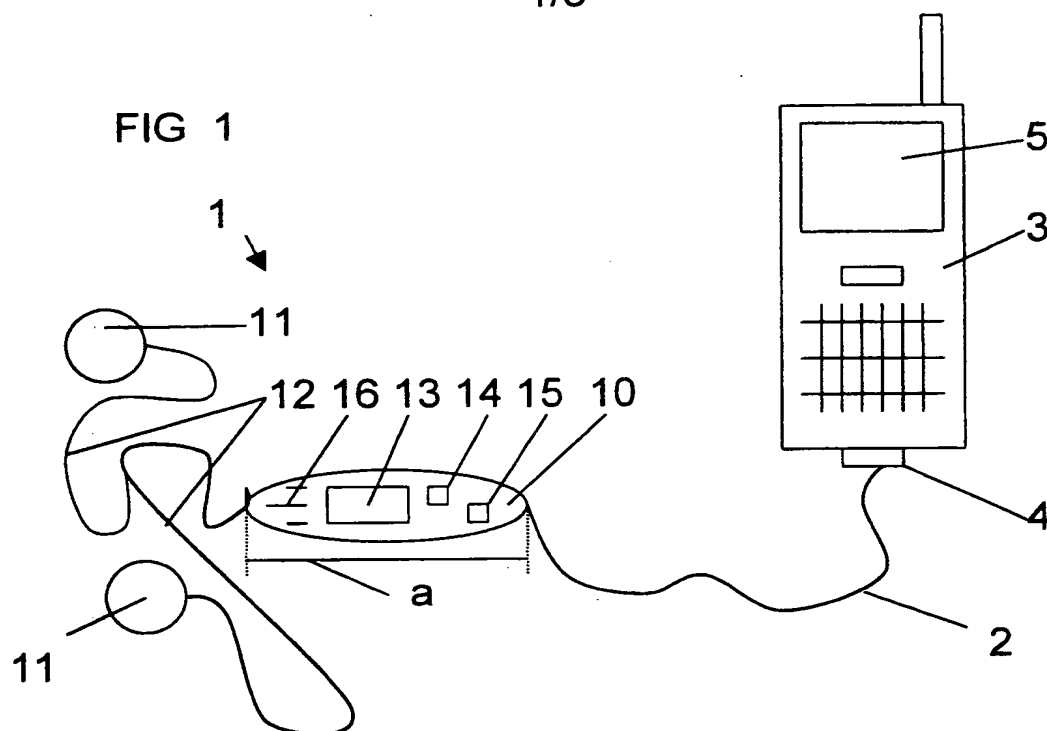


FIG 2

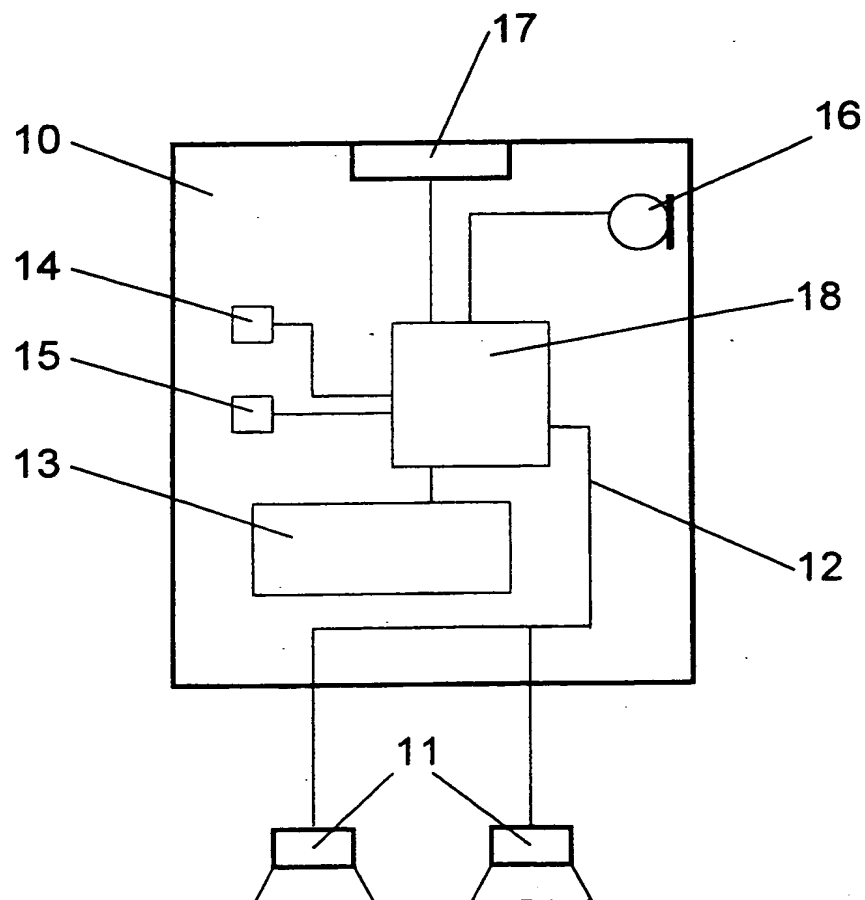


2/3

FIG 3

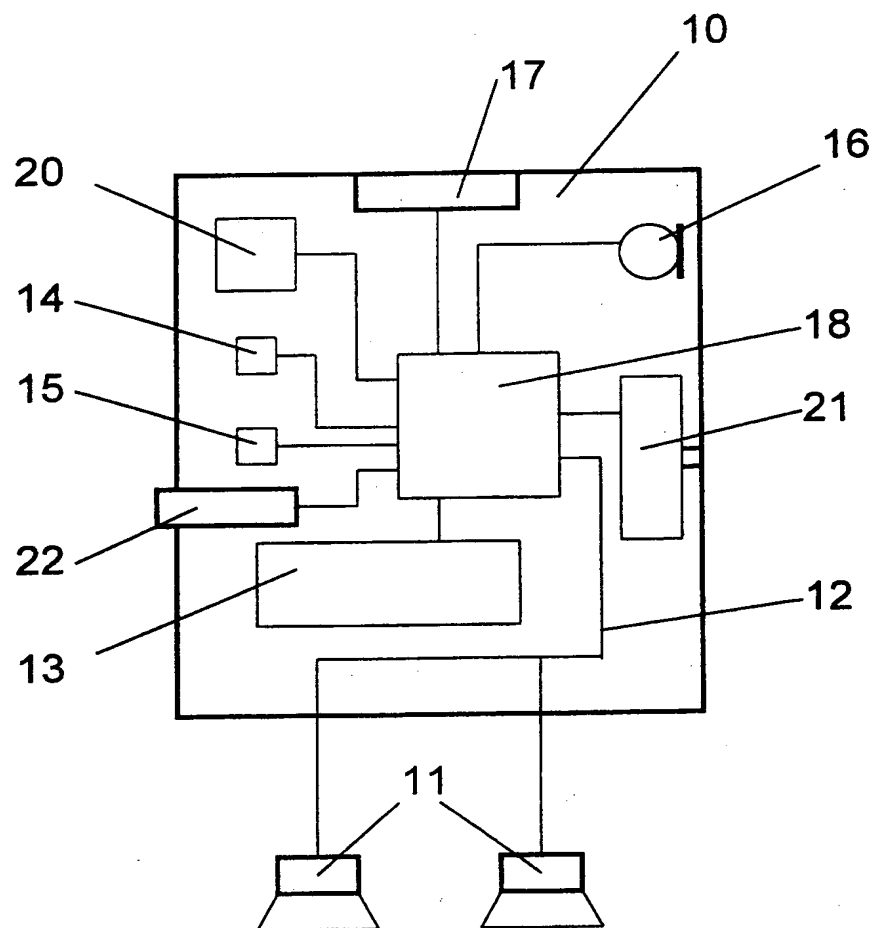

3/3

FIG 4

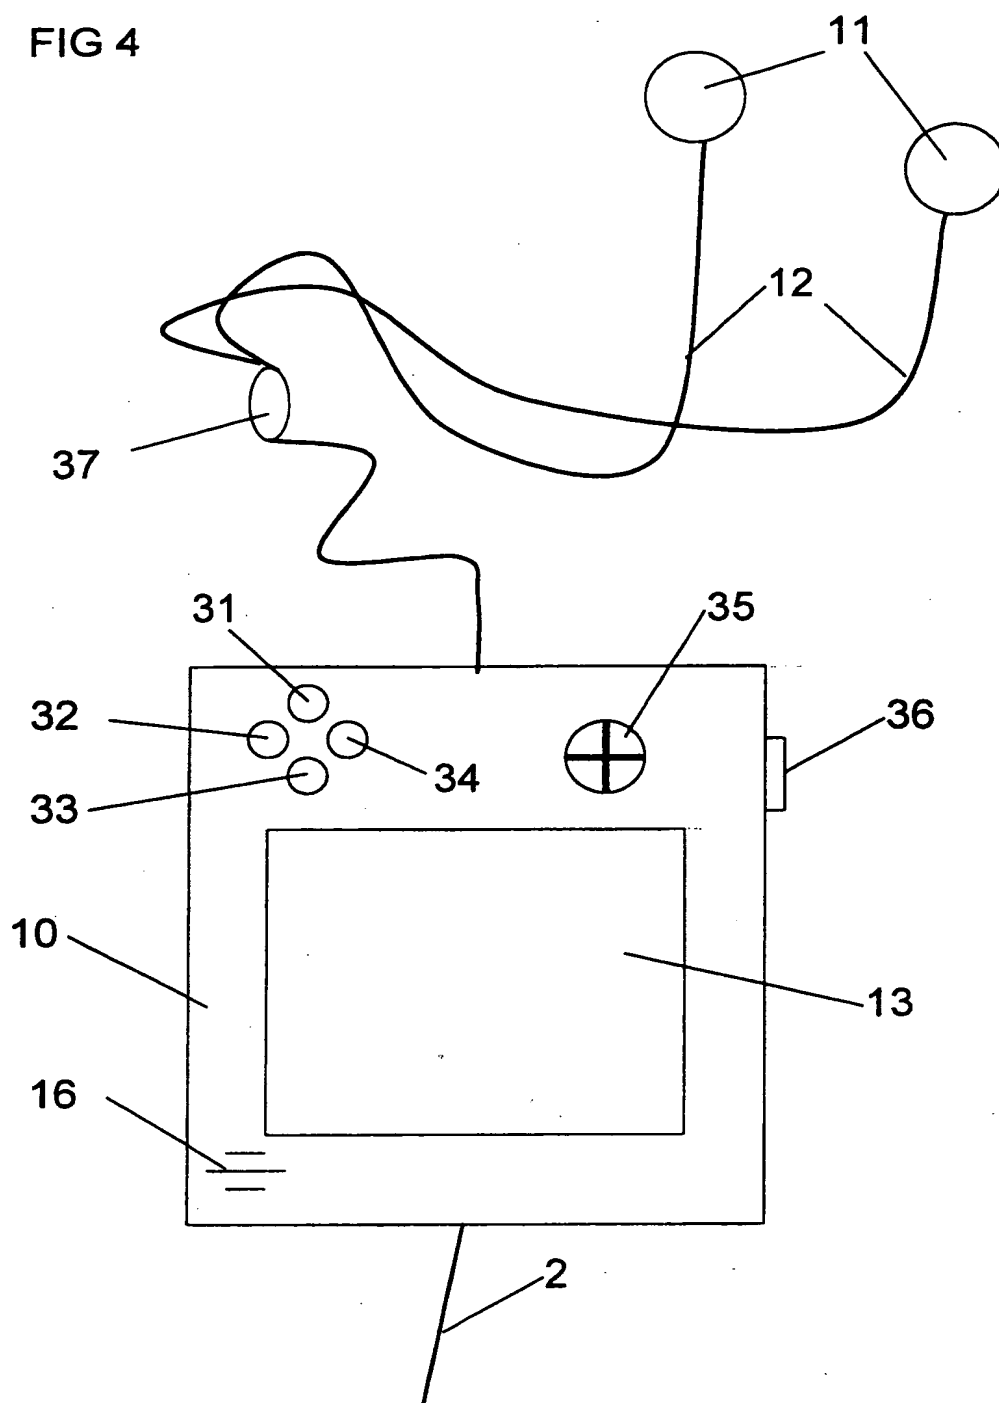

INTERNATIONAL SEARCH REPORT

1

International application No.
PCT/SE 00/00788

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04M 1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04B, H04M, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2329737 A (NEC CORPORATION (INKORPORATED IN JAPAN)), 31 March 1999 (31.03.99), page 12, line 19 - page 34, line 2, figures 1A-6C, abstract	1,3-8
Y	--	2,9-16
Y	US 5805672 A (A. BARKAT ET AL), 8 Sept 1998 (08.09.98), column 2, line 41 - column 5, line 46, figures 1-4, abstract	2,9-16
Y	EP 0892534 A2 (NOKIA MOBILE PHONES LTD.), 20 January 1999 (20.01.99), column 3, line 33 - column 7, line 56, figures 1-9, abstract	2,9-16

☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

15 June 2000

Date of mailing of the international search report

26 -07- 2000

Name and mailing address of the ISA

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Roland Landström / MRo

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/00788

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	ERICSSON REVIEW, Volume 75, No 3, 1998, JAPP HAARTSEN, "Bluetooth - The universal radio interfce for ad hoc, wireless connectivity" page 110 - page 117 -- -----	15

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/SE 00/00788

Patent document cited in search report			Publication date		Patent family member(s)		Publication date	
GB	2329737	A	31/03/99	CN	1215970	A	05/05/99	
				GB	9820472	D	00/00/00	
				JP	11098590	A	09/04/99	

US	5805672	A	08/09/98	IL	108608	A	04/01/98	

EP	0892534	A2	20/01/99	GB	2327555	A	27/01/99	
				GB	9714891	D	00/00/00	
				JP	11122335	A	30/04/99	

THIS PAGE BLANK (USPTO)